

BABUS 6

IP rated downlights

design Roberto Mantovani



IP67-rated, recessed fixtures of the highest build quality, extremely compact dimensions and high output. Recessed optics guarantee high viewing comfort. Extra-clear tempered glass, ATEX cable gland, neoprene cable. Can also be installed with anti-glare filter for maximum viewing comfort.

Incassi IP67 di altissima qualità costruttiva, con dimensioni estremamente contenute ed elevati flussi luminosi. L'ottica arretrata garantisce un alto comfort visivo. Vetro extrachiaro temprato, pressacavo ATEX, cavo in neoprene. Equipaggiabili con filtro antiabbagliamento per il massimo comfort visivo.

Encastrables IP67 de très haute qualité constructive, avec des dimensions extrêmement contenues et flux lumineux élevés. L'optique en retrait garantit un confort visuel élevé. Verre extra-clair trempé, presse-étoupe ATEX, câble en néoprène. Peuvent être équipés avec filtre anti-éblouissement pour le meilleur confort visuel.

Einbau mit Schutzklasse IP67 mit hoher konstruktiver Qualität von extrem kleiner Größe und hohen Lichtströmen. Die Einbauoptik garantiert einen hohen visuellen Komfort. Extra gehärtetes Glas, ATEX Kabeldurchführung, Neopren-Kabel. Kann mit Blendschutzfilter ausgestattet werden für maximalen visuellen Komfort.

IP67 made in Italy



Supply current

350-500mA (V, 8,7V)

Power

3-6W


Series wiring

CRI


85

2-Step MacAdam

Dimensions

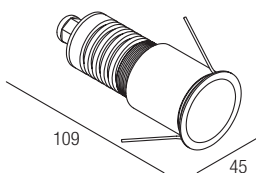

Photometric diagrams

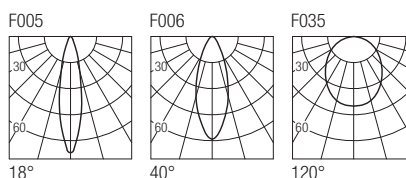


CCT/CRI/Flux

| | 350mA | 500mA |
|-------|-------|-------|
| 2700K | 267lm | 384lm |
| 3000K | 279lm | 400lm |
| 4200K | 309lm | 462lm |
| 6000K | 342lm | 495lm |

Code construction


BT2 X X X

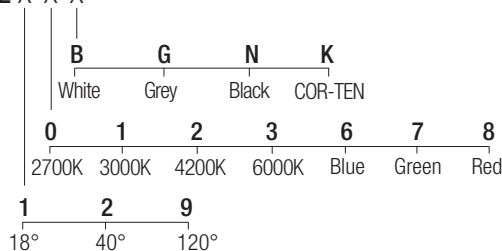

Accessories

CSBU01

Recessing box



LBT201

Low luminance louver



Note: the filter must be ordered together with the lighting fixture

Drivers

