

BRUTUS 20

IP rated downlights

design Roberto Mantovani



Compact projectors equipped with COB LED lights with high luminous performance. Made of anodised aluminium, they are suitable for installation in particularly aggressive environments. The optical quality and fine finishes merge into a product of great reliability and quality. Can be fitted with an anti-glare filter for maximum visual comfort.

Proiettori compatti equipaggiati con COB LED dalle alte prestazioni luminose. Realizzati in alluminio anodizzato, sono ideati all'installazione in ambienti particolarmente aggressivi. Qualità ottica e finiture di pregio si fondono in un prodotto di grande affidabilità e qualità. Equipaggiabili con filtro antiabbagliamento per il massimo comfort visivo.

Projecteurs compacts équipés de LEDS COB haute performance. Réalisés en aluminium anodisé, indiqués pour installations en milieux particulièrement agressifs. La qualité optique et la finesse des finitions se combinent pour donner un produit très fiable. Peut être équipé de filtre anti-éblouissement pour le plus grand confort visuel.



IP65 made in Italy

Kompakte Projektoren, die mit leistungsstarken COB-LEDs ausgestattet sind. Aus eloxiertem Aluminium gefertigt, sind sie für die Installation in besonders aggressiven Umgebungen geeignet. Optische Qualität und feine Verarbeitung vereinen sich zu einem Produkt von großer Zuverlässigkeit und Qualität. Kann mit Blendschutzfilter für maximalen Sehkomfort ausgestattet werden.

Proyectoros compactos equipados con COB LED de alto rendimiento luminoso. Realizados en aluminio anodizado, son adecuados para la instalación en ambientes especialmente agresivos. La calidad óptica y los acabados finos se combinan en un producto de gran fiabilidad y calidad. Se puede equipar con un filtro antideslumbrante para un máximo confort visual.


Supply current
500 mA (V_i 36V)

Power
20 W


CRI
85-93

2-Step MacAdam

Dimensions

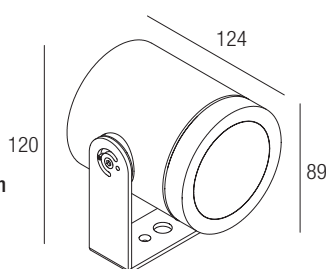


Photometric diagrams

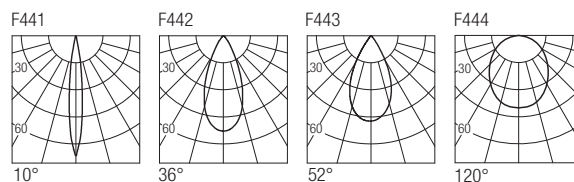

CCT/CRI/Flux

	CRI85	CRI93
2700K	1830lm	1700lm
3000K	2000lm	1830lm
4000K	2100lm	1950lm


Code construction

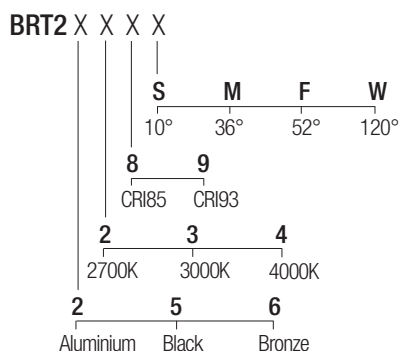

Note: cable cut to measure on request

Accessories

ESBRT201
Earth spike



LBRT201
Low luminance louver




Note: the filter must be ordered together with the lighting fixture

XNTB202 White
XNTB205 Black
XNTB206 Bronze
Antiglare snoot



XXT01
Tree strap



Drivers

