

ELF 724

Ceiling mounted luminaires

design Roberto Mantovani



The Elf range of surface-mounted fixtures, equipped with 24VDC COB LEDs with high luminous performances, combines minimal geometry with a high level of mechanical and optical quality. Made of anodised aluminium, they are suitable for installation in particularly aggressive environments.

La gamma di apparecchi a plafone Elf, equipaggiati con COB LED alimentati a 24VDC dalle alte prestazioni luminose, combina una geometria minimale ad una qualità meccanica ed ottica di alto livello. Realizzati in alluminio anodizzato, sono idonei all'installazione in ambienti particolarmente aggressivi.

La gamme d'appareils à plafond Elf, équipés avec COB LED alimentées à 24VDC aux prestations lumineuses élevées, combine une géométrie minimalistique à une qualité mécanique et optique de haut niveau. Réalisés en aluminium anodisé, ils sont adaptés pour l'installation dans des milieux particulièrement agressifs.



IP65 made in Italy

Die Geräte des Sortiments plafone Elf sind mit 24VDC COB-LEDs mit hoher Lichtleistung ausgestattet und eine minimale Geometrie ist mit hoher mechanischer und optischer Qualität kombiniert. Hergestellt aus eloxiertem Aluminium, eignen sie sich für den Einbau in besonders aggressiven Umgebungen.

La gama de luminarias de techo Elf, equipadas con COB LED alimentadas a 24VDC de alto rendimiento luminoso, combina una geometría minimalista con una alta calidad mecánica y óptica. Realizados en aluminio anodizado, son adecuados para la instalación en ambientes especialmente agresivos.

Supply current

24VDC

Power

7W


Parallel wiring

CRI


85-93

2-Step MacAdam

Dimensions



Photometric diagrams

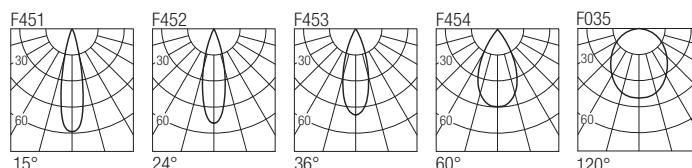


CCT/CRI/Flux

	CRI85	CRI93
2700K	630lm	590lm
3000K	700lm	650lm
4000K	730lm	670lm

Code construction

EF24 X X X X

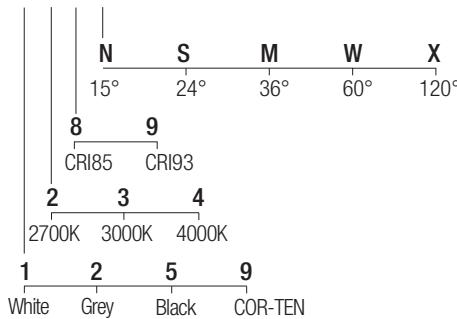

Note: cable cut to measure on request

Accessories

LEF2401

Low luminance louver



Note: the filter must be ordered together with the lighting fixture

Drivers

24 VDC

on/off dimming module dimmable

AL2012 (1..3) 60mm IP20	AL7035 IP20 PUSH DALI 0/1..10V	AL5012 (1..3) 45mm IP20 PUSH DALI 0/1..10V
AL2031 (1..10) 70mm IP20		AL8012 (1..3) IP67 DALI
AL2040 (1..21) 80mm IP20		
AL9212 (1..2) 110mm IP67		
AL9231 (1..10) 85mm IP67		
AL9240 (1..21) 85mm IP67		

Note: dimming module AL7035 to be used in combination with a 24VDC power supply