

FLEXALIGHTING

ERIS

IP rated downlights

design Roberto Mantovani



IP67, 24VDC trimless downlights with the highest manufacturing quality, extremely compact and high light output. The recessed optic offers utmost visual comfort. Fully anodized aluminium body, with front in AISI 316L stainless steel or in anodized, powder-coated aluminium. Extra-clear tempered glass, ATEX cable gland, neoprene cable. Can be equipped with an anti-glare filter for maximum visual comfort.

Incassi trimless IP67 di altissima qualità costruttiva alimentati a 24VDC, con dimensioni estremamente contenute ed elevati flussi luminosi. L'ottica arretrata garantisce un alto confort visivo. Corpo in alluminio anodizzato a spessore, con frontale in acciaio INOX AISI316L o in alluminio anodizzato e verniciato a polveri. Vetro extrachiaro temprato, pressacavo ATEX, cavo in neoprene. Equipaggiabili con filtro antiabbagliamento per il massimo confort visivo.

Encastrables trimless IP67 de très haute qualité constructive alimentés à 24VDC, avec des dimensions extrêmement contenues et flux lumineux élevés. L'optique en retrait garantit un confort visuel élevé. Corps en aluminium anodisé à épaisseur, avec frontal en acier INOX AISI316L ou en aluminium anodisé et peint en poudre. Verre extra-clair trempé, presse-étoupe ATEX, câble en néoprène. Peuvent être équipés avec filtre anti-éblouissement pour le meilleur confort visuel.

Einbauleuchten Trimless IP67 von sehr hochwertiger Konstruktion, die mit 24VDC versorgt werden, mit extrem kleinen Größen und hohen Lichtströmen. Die Rückenoptik garantiert einen hohen Sehkomfort. Körper aus dickem anodisiertem Aluminium, mit Front aus AISI316L Edelstahl oder anodisiertem und pulverbeschichtetem Aluminium. Gehärtetes, extra-klares Glas, ATEX Kabelverschraubung, Neoprenkabel. Kann mit einem Blendschutzfilter für maximalen Sehkomfort ausgestattet werden.

IP67 made in Italy

Supply current
24VDC


Power
7W

Parallel wiring


CRI
85-93

2-Step MacAdam

Dimensions



Photometric diagrams

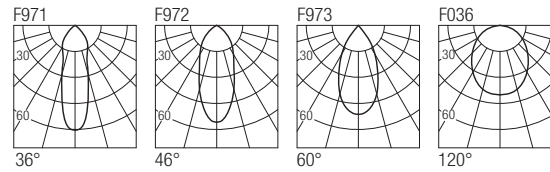


CCT/CRI/Flux

	CRI85	CRI93
2700K	630lm	590lm
3000K	700lm	650lm
4000K	730lm	670lm


Code construction

ER1 X X X X

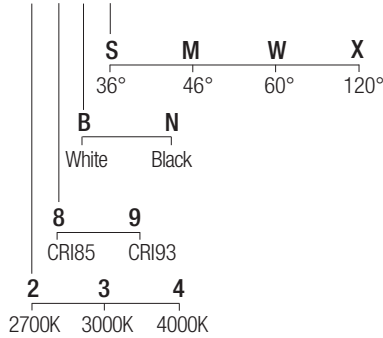

Accessories

ZTC10U ZTC10UB
White Black
Plasterboard recessing frame




LER101
Low luminance louver



Note: the filter must be ordered together with the lighting fixture

Drivers

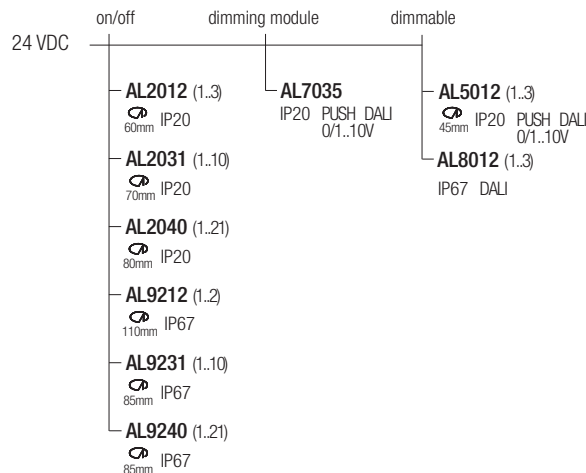

Note: dimming module AL7035 to be used in combination with a 24VDC power supply