


FLEXALIGHTING

GLASS 2

Uplights

design Roberto Mantovani

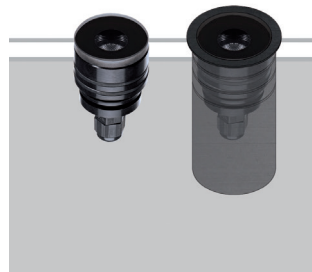

A walkable IP67 for ground recessing of the highest build quality and with a glass front. Extremely small dimensions combine with elevated luminous fluxes. With a body in thick anodised aluminium, it has tempered extra-clear glass, an ATEX cable gland and neoprene cable. Can be fitted with an anti-glare filter for maximum visual comfort.

Incassi a terra IP67 calpestabili di altissima qualità costruttiva, con frontale in vetro. Dimensioni estremamente contenute ed elevati flussi luminosi. Corpo in alluminio anodizzato a spessore, vetro extrachiaro temprato, pressacavo ATEX, cavo in neoprene. Equipaggiabili con filtro antiabbagliamento per il massimo comfort visivo.

Spots à encastrer au sol IP67 de très haute qualité de construction, avec façade en verre. Dimensions extrêmement limitées et à flux lumineux élevés. Corps en aluminium anodisé épais, verre extra-clair trempé, presse-étoupe ATEX, câble en néoprène. Peut être équipé de filtre anti-éblouissement pour le plus grand confort visuel.

IP67 begehbare Bodeneinbauleuchten von sehr hoher Bauqualität, mit Glasfront. Extrem kleine Abmessungen und hohe Lichtströme. Dickes, eloxiertes Aluminiumgehäuse, gehärtetes, extraklares Glas, ATEX-Kabelverschraubung, Neoprenkabel. Kann mit Blendschutzfilter für maximalen Sehkomfort ausgestattet werden.

Luminarias empotrables de suelo IP67 transitables de muy alta calidad de fabricación, con frente de vidrio. Dimensiones extremadamente reducidas y elevados flujos luminosos. Cuerpo grueso de aluminio anodizado, cristal extraclaro templado, prensaestopas ATEX, cable de neopreno. Se puede equipar con un filtro antideslumbrante para un máximo confort visual.



IP67 made in Italy

Supply current
350-500 mA (V, 2,9V)


Power
1-2 W

Series wiring


CRI
85

2-Step MacAdam

Dimensions



Photometric diagrams

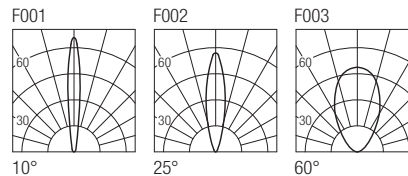


CCT/CRI/Flux

	350mA	500mA
2700K	89lm	128lm
3000K	93lm	133lm
4200K	103lm	154lm
6000K	114lm	165lm

Code construction

Note: cable cut to measure on request


GS2 X X

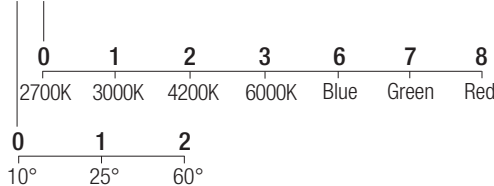

Accessories

CSGS01
Recessing box with trim

Note: recessing box needed for installation



LGS201
Low luminance louver



Note: the filter must be ordered together with the lighting fixture

Drivers

350 mA		500 mA	
on/off	dimnable	on/off	dimnable
AL1034 (1..11) 30mm IP20	AL4000 (1..12) 72mm IP20 PUSH 0/1..10V	AL1074 (1..7) 30mm IP20	AL4010 (1..12) 72mm IP20 PUSH 0/1..10V
AL1035 (1..11) 40mm IP20	AL4051 (2..14) 72mm IP20 DALI 2	AL1077 (1..6) 40mm IP20	AL4151 (2..14) 72mm IP20 DALI 2
AL1037 (1..16) 55mm IP20 S.P.	AL4053 (1..14) 56mm IP20 PUSH IGBT-TRIAC	AL1084 (1..11) 55mm IP20 S.P.	AL4153 (1..14) 56mm IP20 PUSH IGBT-TRIAC
AL9011 (1..12) 44mm IP67	AL8035 (4..16) IP67 DALI	AL9051 (1..11) 44mm IP67	AL8050 (4..16) IP67 DALI