

FLEXALIGHTING


GLASS 724

Uplights

design Roberto Mantovani



IP67 made in Italy

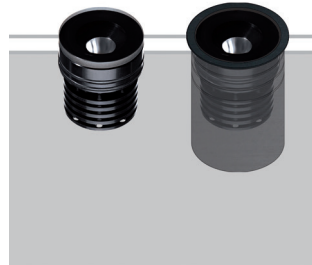

A walkable IP67 for ground recessing of the highest build quality and with a glass front. Extremely small dimensions combine with elevated luminous fluxes. With a body in thick anodised aluminium, it has tempered extra-clear glass, an ATEX cable gland and neoprene cable. Can be fitted with an anti-glare filter for maximum visual comfort.

Incassi a terra IP67 calpestabili di altissima qualità costruttiva, con frontale in vetro. Dimensioni estremamente contenute ed elevati flussi luminosi. Corpo in alluminio anodizzato a spessore, vetro extrachiaro temprato, pressacavo ATEX, cavo in neoprene. Equipaggiabili con filtro antiabbagliamento per il massimo comfort visivo.

Spots à encastrer au sol IP67 de très haute qualité de construction, avec façade en verre. Dimensions extrêmement limitées et à flux lumineux élevés. Corps en aluminium anodisé épais, verre extra-clair trempé, presse-étoupe ATEX, câble en néoprène. Peut être équipé de filtre anti-éblouissement pour le plus grand confort visuel.

IP67 begehbare Bodeneinbauleuchten von sehr hoher Bauqualität, mit Glasfront. Extrem kleine Abmessungen und hohe Lichtströme. Dickes, eloxiertes Aluminiumgehäuse, gehärtetes, extraklares Glas, ATEX-Kabelverschraubung, Neoprenkabel. Kann mit Blendschutzfilter für maximalen Sehkomfort ausgestattet werden.

Luminarias empotrables de suelo IP67 transitables de muy alta calidad de fabricación, con frente de vidrio. Dimensiones extremadamente reducidas y elevados flujos luminosos. Cuerpo grueso de aluminio anodizado, cristal extraclaro templado, prensaestopas ATEX, cable de neopreno. Se puede equipar con un filtro antideslumbrante para un máximo confort visual.

Supply current

24 VDC

Power

7 W


Parallel wiring

CRI


85-93

2-Step MacAdam

Dimensions

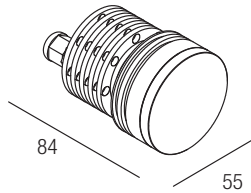

Photometric diagrams

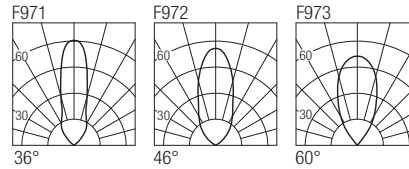


CCT/CRI/Flux

	CRI85	CRI93
2700K	630lm	590lm
3000K	700lm	650lm
4000K	730lm	670lm

Code construction

GS7 X X X

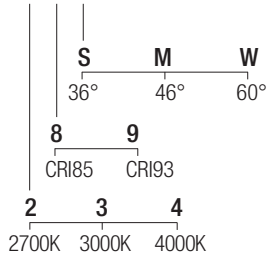


Note: cable cut to measure on request

Accessories

CSGS07

Recessing box with trim

Note: recessing box needed for installation




LGS701

Low luminance louver

Note: the filter must be ordered together with the lighting fixture



Drivers

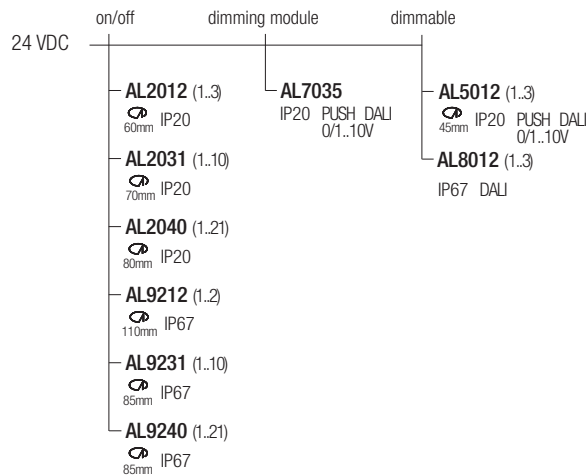

Note: dimming module AL7035 to be used in combination with a 24VDC power supply