

FLEXALIGHTING

HERO 6

Flush optic downlight

design Lapo Grassellini



The Hero recessed fixtures range matches utmost performance to incredible compactness. Revolutionary in dissipative, functional design, it offers the possibility to combine colour temperatures and beam angles in CRI98 with R9 93 versions. The anti-glare filter accessory, which can be applied to the installed product, ensures optimal visual comfort.

La gamma di incassi Hero combina altissime prestazioni ad una dimensione incredibilmente contenuta. Rivoluzionari per il design funzionale alla dissipazione, offrono la possibilità di combinare temperature colore ed aperture di fascio nelle versioni a CRI98 con R9 93. Equipaggiabili con l'accessorio filtro antiabbagliamento, per assicurare il miglior comfort visivo dell'installazione.

La gamme d'encastrables Hero associe prestations très élevées et dimension incroyablement contenue. Révolutionnaires pour le design fonctionnel à la dissipation, ils offrent la possibilité d'associer températures, couleur et ouvertures de faisceau dans les versions à CRI98 avec R9 93. Peuvent être équipés avec l'accessoire filtre anti-éblouissement, pour assurer le meilleur confort visuel de l'installation.

Die Einbauleuchterserie Hero vereint höchste Leistung mit einer unglaublich kleinen Größe. Revolutionär in ihrem funktionalen Design zur Dissipation, bieten sie die Möglichkeit, Temperaturen, Farben und Strahlöffnungen in den Versionen CRI98 mit R9 93 zu kombinieren. Sie können mit dem Entblendungsfilter als Zubehör ausgestattet werden, damit bei der Installation bester Sehkomfort gewährleistet werden kann.

IP44 made in Italy



Supply current
500mA (V, 9V)


Power
6W

Series wiring


CRI
98

2-Step MacAdam

Dimensions




Photometric diagrams



CCT/CRI/Flux

2700K	540 lm
3000K	600 lm
4000K	620 lm

Code construction

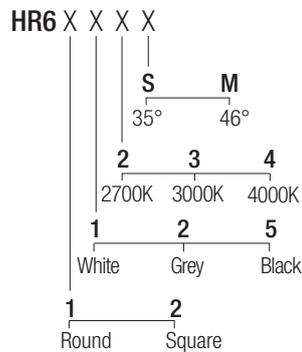

Accessories

SHR601
Milky screen

Note: the screen must be ordered together with the lighting fixture

AL7022
24VDC/500mA constant current converter

Drivers

on/off	dimmable
500 mA	
AL1074 (1..2) 30mm IP20	AL4010 (1..4) 72mm IP20 PUSH 0/1..10V
AL1077 (1..2) 40mm IP20	AL4151 (1..4) 72mm IP20 DALI 2
AL1084 (1..3) 55mm IP20 S.P.	AL4153 (1..4) 56mm IP20 PUSH IGBT-TRIAC