

FLEXALIGHTING


JOS T10

Projector for 24VDC tracks

design Roberto Mantovani



IP20 made in Italy



A projector module for 24VDC track, characterized by a minimal design and high optical performance. It lends itself to accent or general lighting applications, giving the chance to combine various color temperatures and beam angles, with CRI85 or CRI93. Can be fitted with an anti-glare filter for maximum visual comfort.

Modulo proiettore per binario 24VDC, connotato da un design minimale ed elevate prestazioni ottiche, si presta ad applicazioni che vanno dalla luce d'accento all'illuminazione generale. Offre la possibilità di combinare temperature colore ed aperture di fascio, con CRI85 o CRI93. Equipaggiabile con l'accessorio filtro antiabbagliamento, per assicurare il miglior comfort visivo dell'installazione.

Un module projecteur pour rail 24VDC, caractérisé par un design minimaliste et des performances optiques élevées. Il se prête à des applications d'éclairage d'accentuation ou général, offrant la possibilité de combiner différentes températures de couleur et angles de faisceau, avec CRI85 ou CRI93. Peut être équipé d'un filtre anti-éblouissement pour un confort visuel maximal.

Ein Beleuchtungsmodul für 24VDC-Stromschienen, das sich durch ein minimalistisches Design und eine hohe optische Leistung auszeichnet. Es eignet sich für Akzent- oder Allgemeinbeleuchtung und bietet die Möglichkeit, verschiedene Farbtemperaturen und Abstrahlwinkel mit CRI85 oder CRI93 zu kombinieren. Kann mit einem Blendschutzfilter für maximalen Sehkomfort ausgestattet werden.

Un módulo proyector para carril 24VDC, caracterizado por un diseño minimalista y un alto rendimiento óptico. Se presta a aplicaciones de iluminación general o de acento, lo que brinda la posibilidad de combinar varias temperaturas de color y ángulos de haz, con CRI85 o CRI93. Se puede equipar con un filtro antideslumbramiento para un máximo confort visual.


Supply current
24VDC

Power
10W


CRI
85-93

2-Step MacAdam

Dimensions



Photometric diagrams

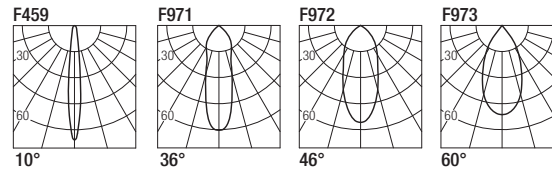


CCT/CRI/Flux

	CRI85	CRI93
2700K	890lm	840lm
3000K	1000lm	930lm
4200K	1040lm	960lm

Code construction

Note: versions with extended arm length are available upon request

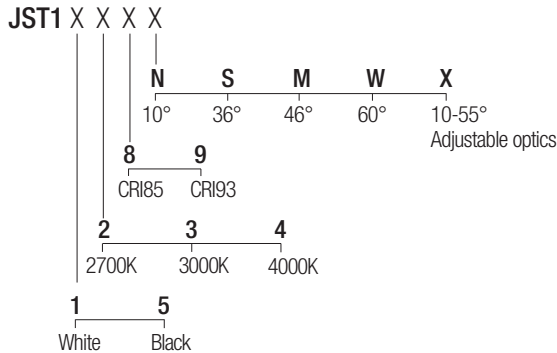

Accessories

LJ01 White
LJ01B Black
Low luminance louver



SJ01 White
SJ01B Black
Milky screen



Note: The filter and the screen are not available in adjustable optics version 10-55°