

KOL

Fixed downlights

design Roberto Mantovani



The Kol range combines extreme compactness with a brightness suitable for general lighting. With its IP65 rating, it can be used in wet areas. Available in eight finishes, four colour temperatures and two extremely clean and high-performing optic varieties.

La gamma Kol combina dimensioni estremamente ridotte a flussi luminosi tali da prestarsi ad illuminazioni generali. Grazie al grado IP65 può essere impiegato in zone umide. Disponibile in otto finiture, quattro temperature colore e due ottiche estremamente pulite e performanti.

La gamme Kol combine des dimensions extrêmement réduites à flux lumineux qui lui permettent de se prêter à des éclairages généraux. Grâce au degré IP65, elle peut être employée dans des zones humides. Disponible dans huit finitions, quatre températures couleur et deux optiques extrêmement propres et performantes.

Die Produktreihe Kol kombiniert extrem kleine Größen mit Lichtströmen, die für die Allgemeinbeleuchtung geeignet sind. Dank IP65 kann sie in Nassbereichen eingesetzt werden. Erhältlich in acht Ausführungen, vier Farbtemperaturen und zwei extrem sauberen und effizienten Optiken.

IP65 made in Italy



Supply current


350-500mA (V, 8,7V)

Power


3-6W

Series wiring

Dimensions




Photometric diagrams

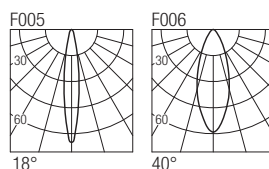

CCT/CRI/Flux

	350mA	500mA
2700K	267lm	384lm
3000K	279lm	400lm
4200K	309lm	462lm
6000K	342lm	495lm

Code construction

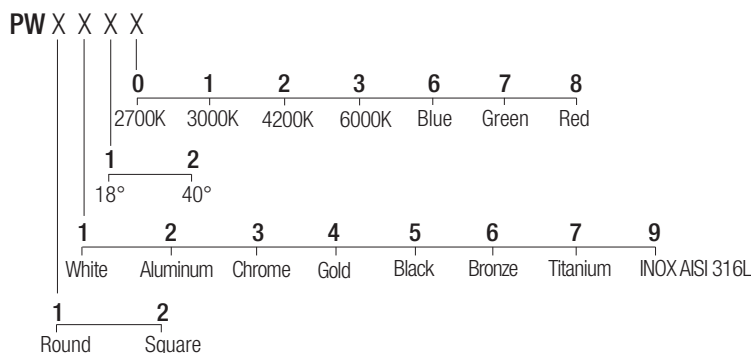

Optionals

CS1002
Recessing box
80 / 33

CS1006
Recessing box
80 / 60/33

L001
Low luminance louver

SC1001
Milky screen

Note: the filter and the screen must be ordered together with the lighting fixture

AL7022
24VDC/500mA constant current converter

Drivers

