

# FLEXALIGHTING

## LAD S10

Surface projectors

design Roberto Mantovani



A projector for wall or ceiling installation, it is characterised by a minimal design and high optical performance. It lends itself to applications ranging from accent lighting to general illumination. Thanks to the use of highly-advanced optics, it offers narrow and precise light beams.

Proiettore per installazione a parete o a soffitto connotato da un design minimale ed elevate prestazioni ottiche. Si presta ad applicazioni che vanno dalla luce d'accento all'illuminazione generale. Grazie all'utilizzo di ottiche estremamente evolute permette fasci luminosi stretti e precisi.

Projecteur pour installation murale ou sur plafond, caractérisé par un design minimaliste et de hautes performances optiques. Il est indiqué pour les applications allant de l'éclairage d'accentuation à l'éclairage général. L'utilisation d'optiques extrêmement évoluées permet d'obtenir des faisceaux étroits et précis.



IP20 made in Italy

Projektor für Wand- oder Deckenmontage, der sich durch ein minimalistisches Design und eine hohe optische Leistung auszeichnet. Eignet sich für Anwendungen, die von der Akzentbeleuchtung bis zur Allgemeinbeleuchtung reichen. Dank der Verwendung extrem fortschrittlicher Optiken ermöglicht es schmale und präzise Lichtstrahlen.

Proyector para instalación en pared o techo caracterizado por un diseño minimalista y un alto rendimiento óptico. Se presta a aplicaciones que van desde la iluminación de acento hasta la iluminación general. Gracias a la utilización de ópticas extremadamente avanzadas permite haces de luz estrechos y precisos.

### Supply current

24VDC

### Power

10W


### Parallel wiring

### CRI


85-93

### 2-Step MacAdam

### Dimensions




### Photometric diagrams

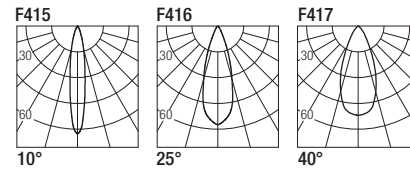

### CCT/CRI/Flux

	CRI85	CRI93
2700K	890lm	840lm
3000K	1000lm	930lm
4000K	1040lm	960lm

### Code construction

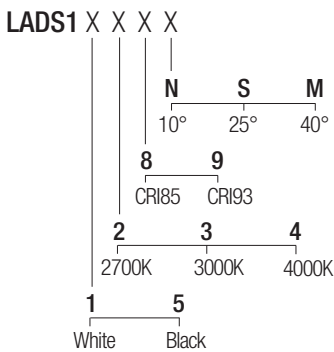

**Note:** versions with extended arm length are available upon request

### Accessories

#### LL01 LL01B

White Black  
Low luminance louver




#### SL01 SL01B

White Black  
Milky screen



### Drivers

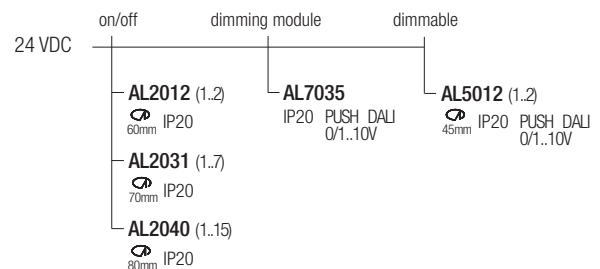

**Note:** dimming module AL7035 to be used in combination with a 24VDC power supply