


TERA 2

Uplights

design Roberto Mantovani

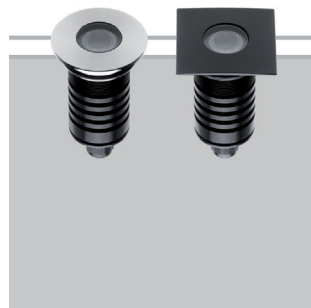

IP67-rated, ground recessed fixtures of the highest build quality, extremely compact dimensions and high output. Fully anodized aluminium body, versions with front in vehicle-proof AISI 316L stainless steel and in walkable powder-coated anodized aluminium. Extra-clear tempered glass, ATEX cable gland, neoprene cable. Can be installed with anti-glare filter for maximum viewing comfort.

Incassi a terra IP67 di altissima qualità costruttiva, con dimensioni estremamente contenute ed elevati flussi luminosi. Corpo in alluminio anodizzato a spessore, versioni con frontale in acciaio INOX AISI316L carrabili, in alluminio anodizzato e verniciato a polveri calpestabili. Vetro extrachiaro temprato, pressacavo ATEX, cavo in neoprene. Equipaggiabili con filtro antiabbagliamento per il massimo comfort visivo.

Encastrables au sol IP67 de très haute qualité constructive, avec des dimensions extrêmement contenues et flux lumineux élevés. Corps en aluminium anodisé à épaisseur, versions avec frontal en acier INOX AISI316L carrossables, en aluminium anodisé et peint en poudre praticables. Verre extra-clair trempé, presse-étoupe ATEX, câble en néoprène. Peut être équipé avec filtre anti-éblouissement pour le meilleur confort visuel.

Einbau am Boden mit Schutzklasse IP67 mit hoher konstruktiver Qualität von extrem kleiner Größe und hohen Lichtströmen. Gehäuse aus eloxiertem Aluminium mit Stärke, Versionen mit Vorderteil aus Edelstahl AISI 316L, aus eloxiertem und pulverbeschichtetem Aluminium. Extra gehärtetes Glas, ATEX Kabeldurchführung, Neopren-Kabel. Kann mit Blendschutzfilter ausgestattet werden für maximalen visuellen Komfort.

IP67 made in Italy



Supply current


350-500mA (V, 2,9V)

Power


1-2W

Series wiring

Dimensions

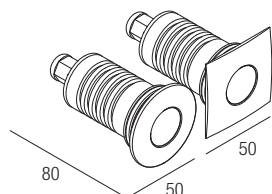

Photometric diagrams

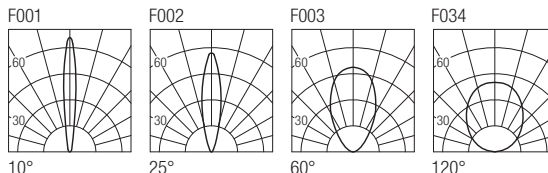


CCT/CRI/Flux

	350mA	500mA
2700K	89lm	128lm
3000K	93lm	133lm
4200K	103lm	154lm
6000K	114lm	165lm

Code construction

XT1 X X X X

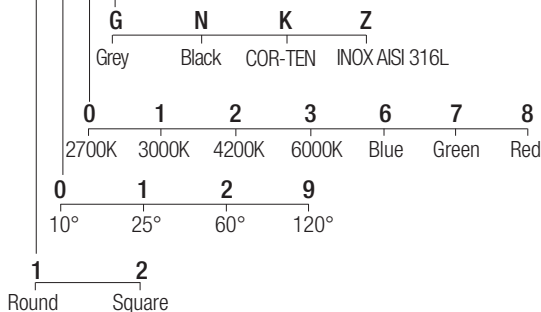


Note: cable cut to measure on request

Optionals

CSXT01

Recessing box



L001

Low luminance louver



Note: the filter must be ordered together with the lighting fixture

Drivers

