

FLEXALIGHTING

MOON R2

Trimless downlights

design Lapo Grassellini



The Moon range of trimless, recessed fixtures matches utmost performance to incredible compactness. Recessed optics ensure high visual comfort. Revolutionary in dissipative, functional design, it offers the possibility to combine colour temperatures and beam angles in CRI85 versions.

La gamma di incassi trimless Moon combina altissime prestazioni ad una dimensione incredibilmente contenuta. L'ottica arretrata garantisce un alto comfort visivo. Rivoluzionari per il design funzionale alla dissipazione, offrono la possibilità temperature colore ed aperture di fascio nelle versioni a CRI85.

La gamme d'encastrables trimless Moon associe prestations très élevées et dimension incroyablement contenue. L'optique en retrait garantit un confort visuel élevé. Révolutionnaires pour le design fonctionnel à la dissipation, ils offrent la possibilité de températures, couleur et ouvertures de faisceau dans les versions à CRI85.



IP44 made in Italy

Die Trimless Einbauleuchterreihe Moon vereint höchste Leistung mit einer unglaublich kleinen Größe. Die Rückwärtsoptik garantiert hohen Sehkomfort. Revolutionär in ihrem funktionalen Design zur Dissipation, bieten sie die Möglichkeit, Temperaturen, Farben und Strahlöffnungen in den Versionen CRI85.

La gama de luminarias empotrables trimless Moon combina un rendimiento muy alto con un tamaño increíblemente pequeño. La óptica hacia atrás garantiza un alto confort visual. Revolucionarios por el diseño funcional para la disipación, ofrecen la posibilidad de temperaturas de color y aperturas de haz en las versiones CRI85.

Supply current
350-500mA (V, 2,9V)


Power
1-2W

Series wiring


CRI
85

2-Step MacAdam

Dimensions




Photometric diagrams

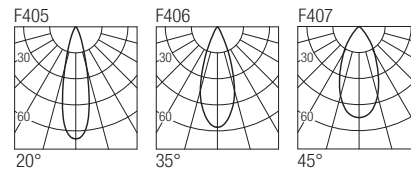

CCT/CRI/Flux


	350mA	500mA
2700K	89 lm	128 lm
3000K	93 lm	133 lm
4200K	103 lm	154 lm

Code construction

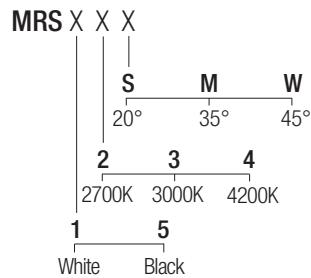

Accessories

ZQC00K ZQC00KB
White Black
Plasterboard recessing frame



AL7022
24VDC/500mA constant current converter

Drivers

