


SASHA 110U

Surface projector

design Lapo Grassellini

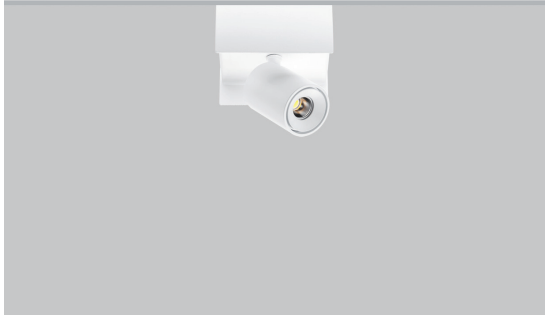

A range of multi-optical spotlights for wall or ceiling installation, designed for accenting and general lighting. The symmetrical bands allow maximum spotlight orientation. The use of high quality COB LEDs, with CRI 85 and CRI 93, is complimented by clean and highly efficient optics.

CE  IP20 made in Italy

Una gamma di proiettori multi ottica per installazione a parete e soffitto, pensata per l'illuminazione di accento e generale. La forma simmetrica delle bandelle permette la massima direzionalità della luce. L'impiego di LED COB di altissima qualità, con CRI 85 e CRI 93, si combina ad ottiche estremamente efficienti e pulite.

Une gamme de projecteurs multi-optique pour installation au mur et au plafond, pensée pour l'éclairage de mise en valeur et général. La forme symétrique des bandelles permet la maximale directionnalité de la lumière. L'emploi de LED COB de très haute qualité, avec CRI 85 et CRI 93, se combine à des optiques extrêmement efficaces et propres.

Eine Produktreihe von Leuchten mit Multi-Optik für die Wand- und Deckeninstallation, entworfen für die Akzentbeleuchtung und Allgemeinbeleuchtung. Die symmetrische Form der Bänder ermöglicht eine maximale Bündelung des Lichts. Die Verwendung von LED COB von höchster Qualität, mit CRI 85 und CRI 93 wird mit extrem effizienten und sauberen Optiken kombiniert.

Una gama de proyectores multióptica para la instalación de pared y de techo concebida para la iluminación puntual y general. La forma simétrica de las barras permite orientar al máximo la luz. El uso de LEDES COB de altísima calidad, con CRI 85 y CRI 93, se combina con ópticas sumamente eficientes y netas.

Supply current

230VAC

Power


8W

CRI


85-93

2-Step MacAdam

Dimensions



Photometric diagrams

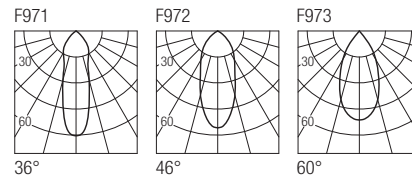


CCT/CRI/Flux

	CRI85	CRI93
2700K	730lm	690lm
3000K	830lm	770lm
4000K	860lm	790lm

Code construction

SU11 X X X X



Accessories

SSU1101

Milky screen 

Note: the screen must be ordered together with the lighting fixture